STANDARD CONSTRUCTION

MODEL: UFC-06-300T-D

FRAME: 16 GAUGE GALVANIZED STEEL BLADES: 18 GAUGE GALVANIZED STEEL ASSEMBLY: 3/16 PLATES STEEL RIVETS

SCREEN: 1/2" X 19 GAUGE GALVANIZED STEEL


SCREEN IN FRAME


FINISH: MILL

INSULATION: 6 LBS. DENSITY PCF MINERAL WOOL


NOTES

- 1. ALL LOUVERS TO BE FABRICATED 1/4" UNDER LISTED OPNG. SIZES UNLESS SPECIFIED "ACTUAL"
- 2. ALL OPNG SIZES TO BE FIELD VERIFIED AND GUARANTEED BY OTHERS PRIOR TO FABRICATION. 3. OTHER SURROUNDING FINISHES ARE FOR REFERENCES ONLY AND TO BE SUPPLIED BY OTHERS.
- (A) 2"X2"XI/4" ALUMINUM ANGLE SUPPORT W/ BLADE BRACE
- (B)2-1/8" TYPICAL T-MULLION
- (C)1-1/2" FLANGE
- (D) 1-1/4" X 1-1/4" X 1/8" SUBFRAME
- (E)5-7/8" X I" X .081" SEMI-INVISIBLE MULLION
- (F)6 LBS. DENSITY PCF MINERAL WOOL

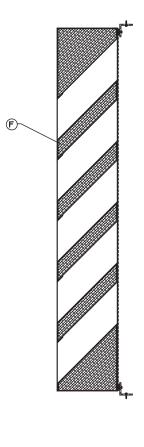





VERTICAL VISIBLE MULLION



MULLION




FLANGE W/ SUBFRAME



CONTINUOUS BLADE

BOX FRAME



FLANGE FRAME



REV.	DESCRIPTION	DATE	BY			UFC-06/SERIES
				DATE:	DRAWN:	DRWG #:
				SCALE: I:I	CHKD:	