EXTRUDED ALUMINUM ADJUSTABLE LOUVER
4" (102) DEEP • DRAINABLE BLADE
MODEL: A-DWE-04

Model A-DWE-04 adjustable, drainable blade type louver combines superior weather protection and architecturally pleasing aesthetics with airflow control including tight shut-off. Suitable for use in exhaust and low to medium velocity intake applications, the design features a drainable blade with rain gutters that divert collected water down concealed side downspouts and out the sill. The blades can be operated manually or with an actuator to provide tight shut-off when desired. Blades are reinforced with full length integral bosses for superior strength and the design exhibits low pressure drop characteristics throughout the airflow range. Model A-DWE-04 provides adjustable flexibility as well as maximum protection against the elements.

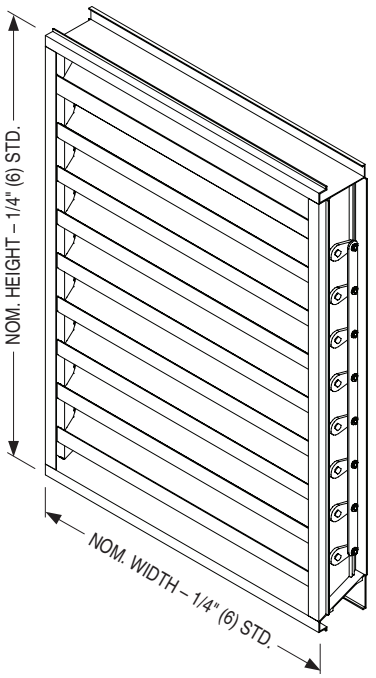

STANDARD CONSTRUCTION:

FRAME:	4" (102) deep, Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness. Integral downspouts and caulking slot provided.
BLADES:	Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness, with reinforcing bosses.
BLADE SPACING:	Approx. 3 1/4" (83) on centers, at 41° angle (fully open).
JAMB SEALS:	Compression type cambered metal.
AXLES:	1/2" (13) dia. plated steel.
BEARINGS:	1/2" (13) dia. Celcon®.
LINKAGE:	Plated steel. Concealed in frame.
SCREEN:	3/4" x .051 (19 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).
ACTUATOR:	Hand locking louver quadrant.
FINISH:	Mill.
MIN. SIZE:	12" W x 12" H (305 x 305).
MAX. SINGLE SECTION SIZE:	48" W x 96" H (1219 x 2438) (With Blade and/or Jamb Seals). 60" W x 120" H (1524 x 3048) (Without Seals). Larger sizes will be manufactured in sections with visible mullion side frame (downspouts are concealed) for field assembly.

OPTIONS:

- ❑ **FL15** Flanged Frame, 1 1/2" (38).
- ❑ **FL20** Flanged Frame, 2" (51).
- ❑ **BPV** PVC Blade Seals.
- ❑ **JSN** No Jamb Seals.
- ❑ **BSSS** Type 304 S.S. Bird Screen.
- ❑ **BSN** No Bird Screen.
- ❑ **ISA** Aluminum Insect Screen.
- ❑ **ISSS** Type 304 S.S. Insect Screen.
- ❑ **WE** Welded Construction.
- ❑ **ESI** Extended Sill.
- ❑ **PASI** Sill Pan.
- ❑ **FR1** 1" (25) Filter Rack.
- ❑ **FR2** 2" (51) Filter Rack.
- ❑ **PACA** Perimeter Anchor Clips.
- ❑ **ACT** Electric Actuator. Specify: _____ .
- ❑ Other: _____ .

OPTIONAL FINISHES:

- ❑ **PC3** Powder Coat AAMA 2603. Color: _____ .
- ❑ **PC4** High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar®). Color: _____ .
- ❑ **PC5** Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar®). Color: _____ .
- ❑ **PCC** Prime Coat.
- ❑ **AN04** Clear Anodized 204-R1.
- ❑ **AN15** Clear Anodized 215-R1.

Color Anodized:

- ❑ **ANLB** Light Bronze.
- ❑ **ANMB** Medium Bronze.
- ❑ **ANDB** Dark Bronze.
- ❑ **ANBK** Black.

OPTIONAL W x H SIZING (1/4" [6.5] Undersize standard)**:**

- ❑ **U00** Exact Size.
- ❑ **U38** Undersize 3/8" (9.5).

amca WORLDWIDE CERTIFIED RATINGS — WATER PENETRATION — AIR PERFORMANCE — AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC. — www.amca.org



OPT. FLANGED FRAME (FL15 STD.)

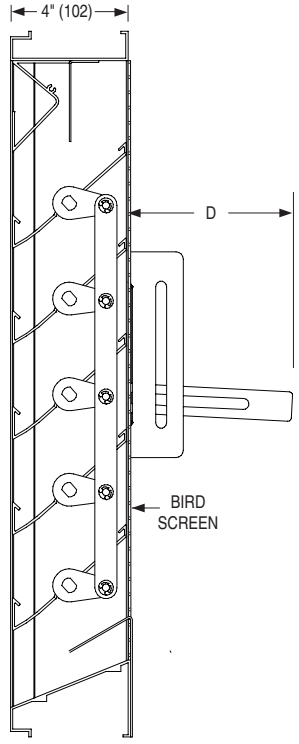

D = 6" (152) with Manual HLLQ
D = 9" (229) with Actuactor

SCHEDULE TYPE:				
PROJECT:				
ENGINEER:	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR:	**6 - 29 - 26**	**LOUVER**	**5 - 16 - 26**	**A-DWE-04**

Dimensions are in inches (mm).

Safe-Air reserves the right to change any information concerning product or pricing without notice.

SAFE-AIR

EXTRUDED ALUMINUM ADJUSTABLE LOUVER
4" (102) DEEP • DRAINABLE BLADE
PERFORMANCE DATA
MODEL: A-DWE-04

FREE AREA in Square Feet and Square Meters

Height in Inches and Meters	Width in Inches and Meters								
	12 0.30	**18** 0.46	**24** 0.61	**30** 0.76	**36** 0.91	**42** 1.07	**48** 1.22	**54** 1.37	**60** 1.52
12 0.3	**0.27** 0.03	**0.44** 0.04	**0.61** 0.06	**0.77** 0.07	**0.94** 0.09	**1.11** 0.10	**1.27** 0.12	**1.44** 0.13	**1.61** 0.15
18 0.46	**0.53** 0.05	**0.85** 0.08	**1.17** 0.11	**1.49** 0.14	**1.82** 0.17	**2.14** 0.20	**2.46** 0.23	**2.78** 0.26	**3.10** 0.29
24 0.61	**0.76** 0.07	**1.22** 0.11	**1.68** 0.16	**2.14** 0.20	**2.60** 0.24	**3.07** 0.28	**3.53** 0.33	**3.99** 0.37	**4.45** 0.41
30 0.76	**1.08** 0.10	**1.74** 0.16	**2.40** 0.22	**3.05** 0.28	**3.71** 0.34	**4.37** 0.41	**5.03** 0.47	**5.69** 0.53	**6.35** 0.59
36 0.36	**1.34** 0.12	**2.15** 0.20	**2.96** 0.28	**3.78** 0.35	**4.59** 0.43	**5.41** 0.50	**6.22** 0.58	**7.04** 0.65	**7.85** 0.73
42 1.07	**1.59** 0.15	**2.56** 0.24	**3.54** 0.33	**4.51** 0.42	**5.48** 0.51	**6.45** 0.60	**7.42** 0.69	**8.39** 0.78	**9.36** 0.87
48 1.22	**1.80** 0.17	**2.89** 0.27	**3.99** 0.37	**5.08** 0.47	**6.18** 0.57	**7.27** 0.68	**8.37** 0.78	**9.47** 0.88	**10.56** 0.98
54 1.37	**2.09** 0.19	**3.37** 0.31	**4.65** 0.43	**5.93** 0.55	**7.20** 0.67	**8.48** 0.79	**9.76** 0.91	**11.04** 1.03	**12.31** 1.14
60 1.52	**2.34** 0.22	**3.77** 0.35	**5.20** 0.48	**6.63** 0.62	**8.06** 0.75	**9.49** 0.88	**10.92** 1.01	**12.35** 1.15	**13.78** 1.28
66 1.68	**2.65** 0.25	**4.26** 0.40	**5.88** 0.55	**7.50** 0.70	**9.11** 0.85	**10.73** 1.00	**12.34** 1.15	**13.96** 1.30	**15.57** 1.45
72 1.83	**2.91** 0.27	**4.68** 0.43	**6.45** 0.60	**8.23** 0.76	**10.00** 0.93	**11.77** 1.09	**13.55** 1.26	**15.32** 1.42	**17.09** 1.59
78 1.98	**3.16** 0.29	**5.09** 0.47	**7.02** 0.65	**8.95** 0.83	**10.88** 1.01	**12.81** 1.19	**14.74** 1.37	**16.67** 1.55	**18.60** 1.73
84 2.13	**3.43** 0.32	**5.52** 0.51	**7.61** 0.71	**9.70** 0.90	**11.79** 1.10	**13.88** 1.29	**15.97** 1.48	**18.06** 1.68	**20.15** 1.87
90 2.29	**3.66** 0.34	**5.90** 0.55	**8.13** 0.76	**10.37** 0.96	**12.60** 1.17	**14.84** 1.38	**17.07** 1.59	**19.31** 1.79	**21.54** 2.00
96 2.44	**3.92** 0.36	**6.31** 0.59	**8.70** 0.81	**11.08** 1.03	**13.47** 1.25	**15.86** 1.47	**18.25** 1.70	**20.64** 1.92	**23.03** 2.14
102 2.59	**4.16** 0.39	**6.70** 0.62	**9.24** 0.86	**11.78** 1.09	**14.32** 1.33	**16.86** 1.57	**19.40** 1.80	**21.94** 2.04	**24.48** 2.27
108 2.74	**4.47** 0.42	**7.20** 0.67	**9.92** 0.92	**12.65** 1.17	**15.37** 1.43	**18.10** 1.68	**20.82** 1.93	**23.55** 2.19	**26.28** 2.44
114 2.9	**4.73** 0.44	**7.62** 0.71	**10.50** 0.98	**13.39** 1.24	**16.27** 1.51	**19.16** 1.78	**22.05** 2.05	**24.93** 2.32	**27.82** 2.58
120 3.05	**4.99** 0.46	**8.03** 0.75	**11.07** 1.03	**14.11** 1.31	**17.16** 1.59	**20.20** 1.88	**23.24** 2.16	**26.28** 2.44	**29.33** 2.72

amca WORLDWIDE CERTIFIED RATINGS
WATER PENETRATION
AIR PERFORMANCE
AIR MOVEMENT AND CONTROL ASSOCIATION INTERNATIONAL, INC.®
www.amca.org

SCHEDULE TYPE:	Page 2 of 3 Dimensions are in inches (mm).			
PROJECT:				
ENGINEER:	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR:	**6 - 29 - 26**	**LOUVER**	**5 - 16 - 26**	**A-DWE-04**

Safe-Air reserves the right to change any information concerning product or pricing without notice.

EXTRUDED ALUMINUM ADJUSTABLE LOUVER
4" (102) DEEP • DRAINABLE BLADE
PERFORMANCE DATA
MODEL: A-DWE-04

PRESSURE DROP

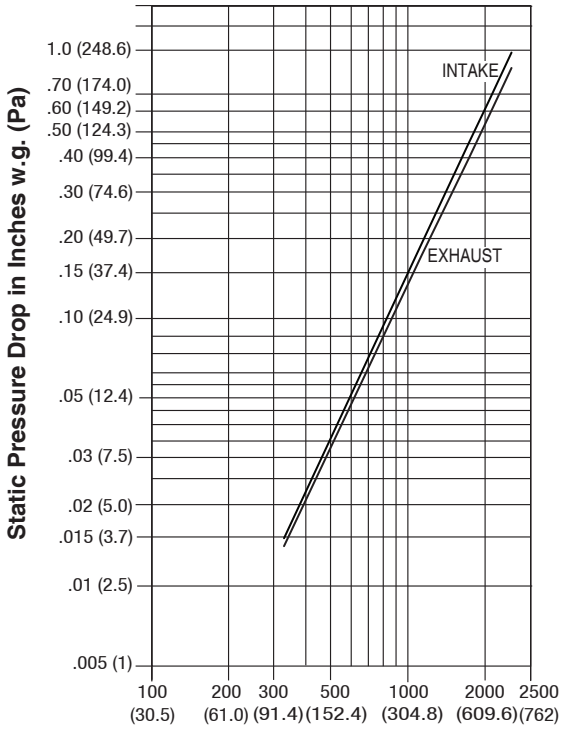

Air Velocity in Feet (Meters) Per Minute Through Free Area

Louver test size: 48" x 48" (1219 x 1219 mm).
Standard air density @ 0.075 lbs/ft³.
Tested to AMCA Fig. 5.5 - 6.5.

AIR LEAKAGE (Damper fully closed)

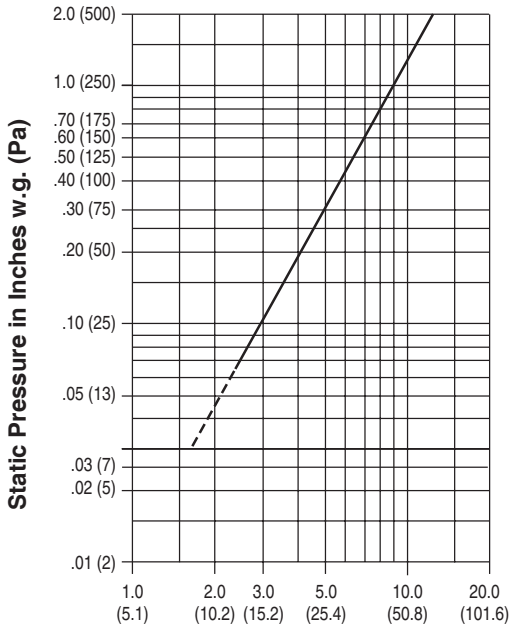

Leakage in CFM/ft.² (L/s/m²)

Louver test size: 48" x 48" (1219 x 1219 mm)
with blade and jamb seals.

AIRFLOW/ WATER PENETRATION DATA
for 48" x 48" (1219 x 1219) Louver Size

	Free Area %	52%
	Free Area sq. ft. (sq. m.)	8.37 (0.78)
INTAKE	Free Area Velocity at Point of Beginning Water Penetration at .01 oz./sq. ft. (3 ml/sq. m) (15 min. test duration)	938 fpm (286 m/min.)
INTAKE	Air Volume at 938 fpm Free Area Velocity	7852 cfm (3706 l/s)
INTAKE	Pressure Drop @ 938 fpm	.13 in. w.g. (32 Pa)

NOTE: To minimize water penetration when sizing intake louvers, select a Free Area Velocity that is **below** the point of beginning water penetration.

Safe-Air certifies that the Model A-DWE-04 shown herein is licensed to bear the AMCA Certified Ratings Program seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Program seal applies to Water Penetration and Air Performance ratings.

Louvers were tested in accordance with AMCA Standard 500-L.

SCHEDULE TYPE:	Page 3 of 3			
PROJECT:	Dimensions are in inches (mm).			
ENGINEER:	**DATE**	**B SERIES**	**SUPERSEDES**	**DRAWING NO.**
CONTRACTOR:	**6 - 29 - 26**	**LOUVER**	**5 - 16 - 26**	**A-DWE-04**

Safe-Air reserves the right to change any information concerning product or pricing without notice.