

Weather Protective Blade Louver in 4" thick frame design Model LFC-04

Features – Traditional design with blades fixed at a 45° angle in a clean architecturally appealing style.

STANDARD CONSTRUCTION

FRAME

LFC-04" (102) thick, is 20 gauge (1.0) galvanized steel in style #2

BLADES

LFC- 04", (102) are 20 gauge (1.0) galv. steel, apx. spacing is 4 3/8" (111) @ 45°

MAXIMUM SIZE

Unlimited, with mullions, structural bracing supplied by others

MAXIMUM SINGLE SECTION

120"w x 96"H or 96"w x 120"H (3048 x 2438) or (2438 x 3048)
(allows for best handling)

MULLIONS

Visible

MINIMUM SIZE

12" W x 12" H (305 x 305)

UNDERSIZED


3/8" (10) under ordered size unless specified Exact or Actual

SCREEN

1/2" (13) wire mesh 19 gauge (1.1) galvanized bird screen no frame

FINISH

Mill

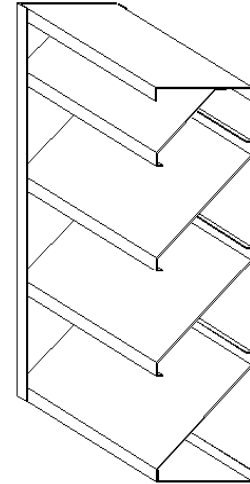

OPTIONAL CONSTRUCTION

FRAME – Available in a heavier construction up to 10 gauge (3.5)

BLADES - Available in a heavier construction up to 12 gauge (2.7)


SPECIFIED MATERIAL – Aluminum, Stainless or as requested

SCREENS - Many styles available please consult screen listing


MULLIONS – Invisible for enhanced architectural appearance.

FINISH – Air-dry primer, polyurethane, epoxy, or enamel. Baked epoxy or enamel. Kynar (Kynar limitations on steel.)

MULLION STYLES

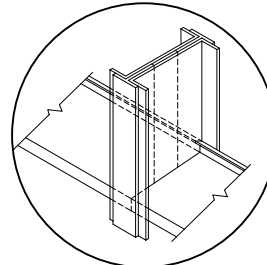

Visible

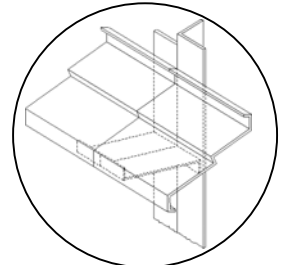

Invisible

SPECIAL PURPOSE CONSTRUCTION

Special shapes; Round, Triangle, Trapezoid, Octagon, etc.

Fully welded assembly


Security bars

Filter racks


Hinged as walk through door or for swing out access

Sleeved for ductwork connection


FRAME STYLES




1- Flange (1.5")



2 – Channel




7- Channel with Sill Extension



9 - Flange with Sub Frame

TYPICAL SCREEN STYLE



Wire Mesh
Standard

DATE	ARCHITECT			ENGINEER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION

DEPENDABLE PRODUCTS SINCE 1955

SAFE-AIR OF ILLINOIS INC.


Engineering and General Offices

1855 South 54th Avenue, Cicero, Illinois 60804

Phone 708-652-9100 FAX 708-652-9158

All tests performed at an independent laboratory and based on AMCA standard 500-L for air performance and water penetration.

AIR PERFORMANCE

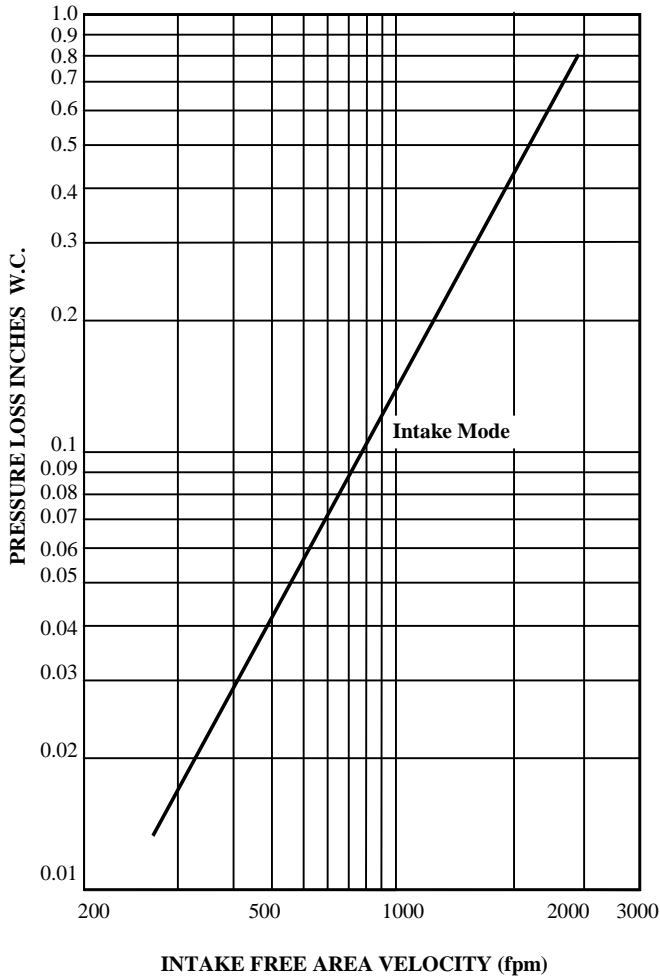

CALCULATING PRESSURE LOSS

Based upon a given flow rate (in CFM), the flowing pressure loss may be determined from the "air performance" graph, knowing the sq. ft. of free area of the louver. Alternately, the free area may be determined based upon a volumetric flow rate and a maximum pressure loss. Utilizing the "air performance" graph.

_____ in. W.C. Max. Pressure Loss Intake or Exhaust

_____ FPM (Free Area Velocity From "Air Performance" Graph)

_____ CFM / _____ FPM Free Area Velocity = _____ Sq. Ft. Free Area


CALCULATING MAXIMUM AIRFLOW BEFORE WATER PENETRATION

The "free area flow rate" at which water penetration commences (.01 oz. of water) is established at, 670 fpm (205) for LFC-04, and will vary depending upon actual weather conditions. The "water penetration" graph illustrates the results of actual laboratory test on a 48" x 48" (1219 x 1219) test sample subjected to hypothetical rainfall conditions. To determine the free area (in sq. ft.) based upon a known volumetric flow rate in CFM;

_____ CFM / _____ FPM = _____ SQ. FT. FREE AREA (System Requirements)

Water Penetration Graph
in oz. of water per sq. ft. of free area over a 15 min. test period

	.01	.02	.05	.1	.2	.3 (H2O)
	670	695	730	760	778	790 (fpm)

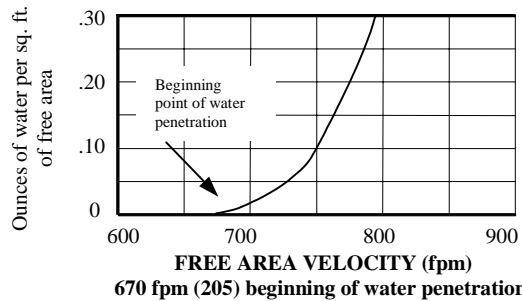

FREE AREA CALCULATIONS IN SQ. FT.

		WIDTH																			
		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	
HEIGHT	Inches	12	0.38	0.60	0.82	1.04	1.26	1.48	1.70	1.92	2.14	2.36	2.58	2.80	3.02	3.24	3.46	3.67	3.89	4.11	4.33
	18	0.58	0.91	1.24	1.57	1.90	2.23	2.56	2.89	3.22	3.55	3.88	4.21	4.54	4.87	5.20	5.53	5.86	6.19	6.52	
	24	0.88	1.38	1.88	2.39	2.89	3.39	3.89	4.40	4.90	5.40	5.90	6.41	6.91	7.41	7.91	8.42	8.92	9.42	9.92	
	30	1.16	1.82	2.48	3.14	3.80	4.46	5.12	5.78	6.44	7.10	7.76	8.42	9.08	9.74	10.40	11.06	11.72	12.38	13.04	
	36	1.37	2.16	2.95	3.73	4.52	5.30	6.09	6.87	7.66	8.45	9.23	10.02	10.80	11.59	12.37	13.16	13.94	14.73	15.52	
	42	1.69	2.65	3.61	4.58	5.54	6.50	7.47	8.43	9.39	10.36	11.32	12.28	13.25	14.21	15.17	16.14	17.10	18.06	19.03	
	48	1.93	3.03	4.13	5.23	6.33	7.43	8.53	9.63	10.73	11.83	12.93	14.03	15.13	16.23	17.33	18.43	19.53	20.63	21.73	
	54	2.18	3.43	4.67	5.92	7.17	8.41	9.66	10.91	12.15	13.40	14.65	15.89	17.14	18.39	19.63	20.88	22.12	23.37	24.62	
	60	2.49	3.92	5.34	6.76	8.19	9.61	11.04	12.46	13.89	15.31	16.73	18.16	19.58	21.01	22.43	23.85	25.28	26.70	28.13	
	66	2.70	4.24	5.78	7.32	8.86	10.40	11.94	13.48	15.02	16.56	18.10	19.64	21.18	22.72	24.26	25.80	27.34	28.88	30.42	
	72	2.99	4.70	6.40	8.11	9.82	11.52	13.23	14.94	16.65	18.35	20.06	21.77	23.48	25.18	26.89	28.60	30.30	32.01	33.72	
	78	3.27	5.14	7.01	8.88	10.75	12.62	14.49	16.36	18.23	20.10	21.97	23.84	25.71	27.58	29.45	31.32	33.19	35.06	36.93	
84	3.48	5.47	7.46	9.45	11.44	13.44	15.43	17.42	19.41	21.40	23.39	25.38	27.37	29.36	31.35	33.34	35.33	37.32	39.31		
90	3.79	5.96	8.13	10.30	12.47	14.63	16.80	18.97	21.14	23.31	25.48	27.64	29.81	31.98	34.15	36.32	38.48	40.65	42.82		
96	4.04	6.35	8.66	10.97	13.28	15.59	17.90	20.21	22.52	24.83	27.14	29.45	31.76	34.07	36.38	38.69	41.00	43.31	45.62		
102	4.29	6.74	9.19	11.64	14.09	16.55	19.00	21.45	23.90	26.35	28.80	31.25	33.70	36.16	38.61	41.06	43.51	45.96	48.41		
108	4.60	7.23	9.86	12.49	15.12	17.75	20.37	23.00	25.63	28.26	30.89	33.52	36.15	38.78	41.41	44.04	46.66	49.29	51.92		
114	4.81	7.56	10.31	13.06	15.81	18.56	21.31	24.06	26.81	29.56	32.31	35.06	37.81	40.56	43.31	46.06	48.81	51.56	54.31		
120	5.10	8.01	10.92	13.83	16.74	19.66	22.57	25.48	28.39	31.30	34.22	37.13	40.04	42.95	45.87	48.78	51.69	54.60	57.51		