

Weather Hood Model - WH-1

Design Features – Protect louvers, dampers or fan systems from outside elements. Supplied with standard 1-1/2" flange on all sides ready for wall mount installation.

STANDARD CONSTRUCTION

MATERIAL

18 gauge galvanized steel – Galvanized construction
 .063" thk. formed aluminum 5005-H34 – Aluminum construction

ASSEMBLY

Stitch welded construction

MINIMUM SIZE

Unlimited, with mullions, structural bracing supplied by others

MAXIMUM FACTORY ASSEMBLY SIZE

120" w x 60 h" x 60" d (allows for best handling)
 (Type of finish may limit maximum single section)

MINIMUM SIZE

12" x 12" x 12"

UNDERSIZED


1/4" under ordered size unless specified Exact or Actual

SCREEN

1/2" Mesh x 19 ga. galvanized screen – Galvanized construction
 3/4" Mesh x 050 expanded alum. screen – Aluminum construction

FINISH

Mill

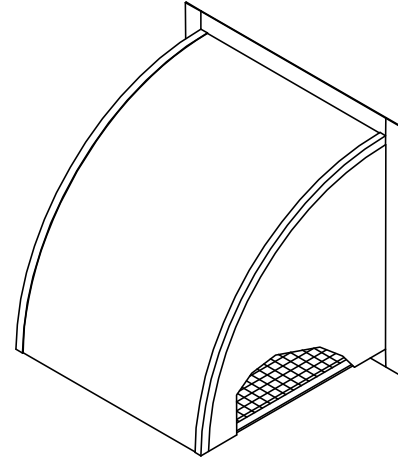

ISOMETRIC VIEW

OPTIONAL CONSTRUCTION

MATERIAL – Available in heavier construction

SCREEN - Many styles available please consult screen listing

FINISH – Air-dry primer, polyurethane, epoxy, or enamel, baked epoxy or enamel, Kynar, or Powder coat.

SPECIAL PURPOSE CONSTRUCTION

Fully welded construction

Security bars


Filter racks

Hinged as walk through door or for swing out for access


Sleeved for ductwork connection

** Consult DOWCO for additional technical information.

TYPICAL SCREEN STYLES



Expanded Aluminum
 Std. for alum. const.



Wire Mesh
 Std. for galv. const.

DATE	ARCHITECT			CUSTOMER
PROJECT				
ITEM	QTY	W	H	DESCRIPTION


DOWCO
Products Group
A division of Safe Air of Illinois
 DEPENDABLE PRODUCTS SINCE 1955
SAFE-AIR/DOWCO
Engineering and General Offices
 1855 South 54th Avenue, Cicero, Illinois 60804
 Phone 708-652-9100 FAX 708-652-9158